


Zephyr Models Z3H, Z5H, Z6S/H





Legend

- 1. Permanently Lubricated Motor
- 2. Accessible Terminal Box & Receptacle
- 3. Centrifugal Blower Wheel & Housing
- 4. Backdraft Damper
- 5. Acoustically Insulated Housing
- 6. Duct Sleeve
- 7. Anti-Vibration Grommets
- 8. Removable Decorator Deluxe Grille with Self-Adjusting Springs - 85% Free Area
- 9. Adjustable Mounting Flange

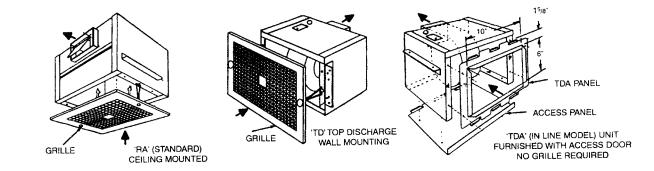

Optional Accessories

Speed Control or Time Delay Switch	Sloped Roof Cap	Wall Cap	Flat Roof Cap	Brick Vent
Hard States	6 1/2" 10 3/4" 18 3/4" 14 1/4"	10" 5 1/8" 3 1/4" 5 7/16 3 3 3/6"	12" 11 1/2" 16 7/8" 16 7/8"	4 3/4" 4 3/4"
Speed Control: Model LT30 Time Delay: Model AM12	Model SL20	Model WC10	Model WCF06	Model B68

Note: On Z6S/H, when using a variable speed controller, wire to high (H) setting only.

Material: Galvanized Steel Housing



This drawing illustrates our understanding of order requirements. When approved, it represents details for fabrication, as such, PennBarry will not be responsible for revisions in the field or other changes after release for fabrication. Published and protected by PennBarry, Richardson, TX. All rights reserved. May not be reproduced partially or in full without permission from the publisher. No rights conveyed to manufacture partially or in full, use or sell either the method of construction represented or any invention in any way related thereto.