


VPLUME 2 X 1
 FINAL ASSEMBLY WITH PLENUM

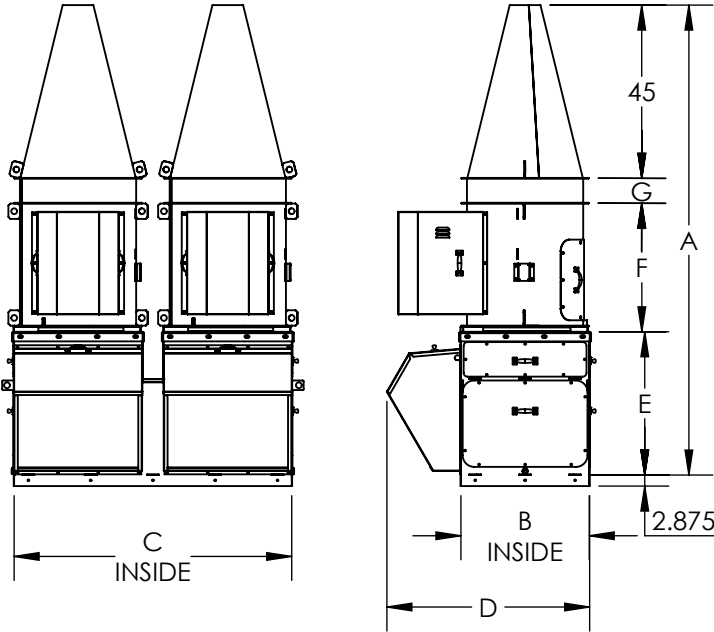

All dimensions are in inches.

A = Overall system height (without curb)

B = Width of Curb

C = Length of Curb

D = Overall width of the system

E = Height of plenum

F = Height of fans

G = Height of stack extension

DIMENSIONAL DATA

MODEL	A	B	C	D	E	F	G
90	122	21 1/2	48 1/4	41	34 1/4	27 1/4	15 1/2
105	122	21 1/2	48 1/4	41	34 1/4	27 1/4	15 1/2
122	122	21 1/2	48 1/4	41	34 1/4	27 1/4	15 1/2
135	122	23 1/2	52 1/4	43	37 1/4	29 1/4	10 1/2
150	122	25 1/2	56 1/4	45	38 1/4	31 1/4	7 1/2
165	122	27 1/2	60 1/4	47	39	31 1/2	6 1/2
182	122	33 1/2	72 1/4	53	37	33 1/2	6 1/2
200	125	35 1/2	76 1/4	59	43 1/2	36 1/2	-
222	129	39 1/2	84 1/4	62 1/4	43 1/2	40 1/2	-
245	141	45 1/2	96 1/4	71	51	45	-
270	146	49 1/2	104 1/4	75	51 1/2	49 1/2	-
300	153	58 1/4	122	85 3/4	53	55	-
330	166	60	125 3/4	89 1/2	59 1/2	61 1/2	-
365	172	63	131 1/2	92 1/2	59	68	-
402	183	70	145 1/2	99 1/2	63 1/2	75	-

STANDARD CONSTRUCTION FEATURES

- Stainless Steel Shaft
- Bolted Access Door
- Weather Cover
- Air Dry Phenolic Coat with UV (Gray)
- Fan Drain
- Stainless Steel Hardware
- Ceramic Shaft Seal
- Aluminum Non-Overloading Wheel
- AMCA B
- L10/100K Concentric Bearings
- Nylon Lube Line
- UL/cUL 705 Certified
- AMCA Certified for Air & Sound
- High Velocity Discharge Nozzle
- Designed to Withstand 125 mph Wind

ACCESSORIES

- Plenum Air Bypass with Motorized Control Damper
- NEMA 3R Disconnect Switch
- 2.0 Service Factor Drives
- Isolation Damper:
- VFD (Shipped Loose)
- Roof Curb
- Gravity
- Motorized
- Piezo Ring:
- With Transducer
- Without Transducer

REVISION:

FORM:

REPLACES: