




DATE: TAG:
 JOB:
 PROJECT:
 COMPANY:
 SALES PERSON:

VPLUME
 FINAL ASSEMBLY WITHOUT PLENUM

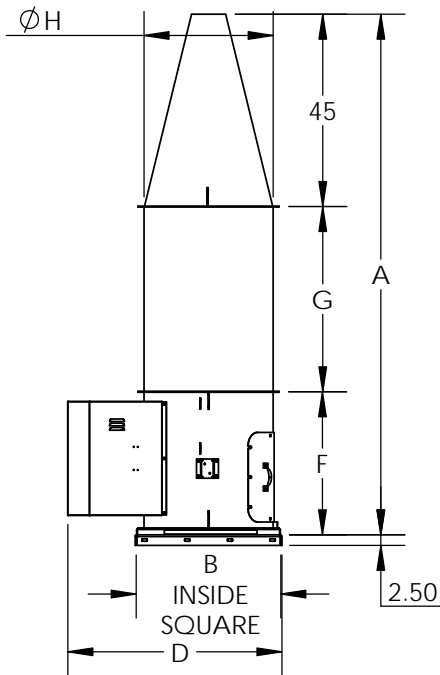

All dimensions are in inches.
 A = Overall system height (without curb)
 B = Width of Curb
 D = Overall width of the system
 F = Height of fan
 G = Height of stack extension
 H = Housing Outer Diameter

*Weights do not include motor and drives

DIMENSIONAL & WEIGHT DATA

MODEL	A	B	D	F	G	H	WEIGHT*(LBS)
90	122	22	39 1/2	27 1/4	49 3/4	18 1/2	341
105	122	22	39 1/2	27 1/4	49 3/4	18 1/2	341
122	122	22	39 1/2	27 1/4	49 3/4	18 1/2	341
135	122	24	43	29 1/4	47 3/4	20 1/2	393
150	122	26	45	31 1/4	45 3/4	22 1/2	430
165	122	28	45	31 1/2	45 1/2	25	472
182	122	34	50 1/4	33 1/2	43 1/2	30 1/4	573
200	122	36	58 1/4	35	42	33 1/4	659
222	122	40	60 3/4	39	38	36 3/4	667
245	122	46	66	43	34	40 3/4	767
270	122	50	72 1/2	47 1/2	29 1/2	44 3/4	914
300	122	59	80	53	24	49 3/4	1059
330	122	60 3/4	82 3/4	59 1/2	17 1/2	49 1/4	1105
365	122	63 3/4	86	66	11	54 3/4	1372
402	122	70 3/4	92 1/4	73	4	60 1/4	1593

STANDARD CONSTRUCTION FEATURES

- Stainless Steel Shaft
- Bolted Access Door
- Weather Cover
- Air Dry Phenolic Coat with UV (Gray)
- Fan Drain
- Stainless Steel Hardware
- Ceramic Shaft Seal
- Aluminum Non-Overloading Wheel
- AMCA B
- L10/100K Concentric Bearings
- Nylon Lube Line
- UL/cUL 705 Certified
- AMCA Certified for Air & Sound
- High Velocity Discharge Nozzle
- Designed to Withstand 125 mph Wind

ACCESSORIES

- NEMA 3R Disconnect Switch
- VFD (Shipped Loose)
- Piezo Ring:
- 2.0 Service Factor Drives
- Roof Curb
- With Transducer
- Without Transducer

REVISION:

FORM:

REPLACES: