


ISOLATOR SUBMITTAL  
 FLEX PAD

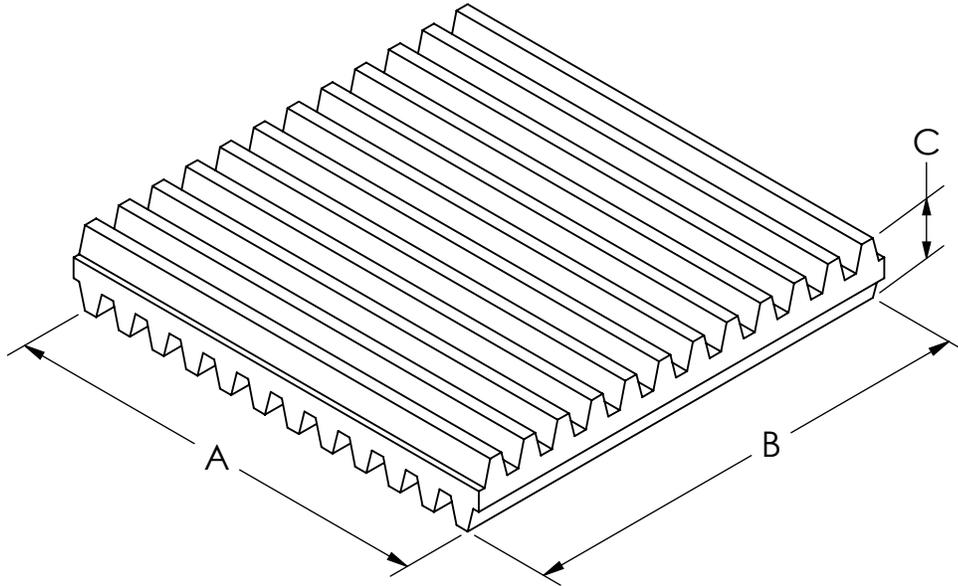

**MODEL RATINGS**

TYPE	MAX. DEFL.	OP. HT.	CAPACITY RANGE
NPD-2-45	0.09	0.29	100 - 240
NPD-2-65	0.08	0.30	180 - 480
NPD-3-45	0.09	0.29	225 - 540
NPD-3-65	0.08	0.30	405 - 1080
NPD-4-45	0.09	0.29	400 - 960
NPD-4-65	0.08	0.30	720 - 1920
NPD-6-45	0.09	0.29	900 - 2160
NPD-6-65	0.08	0.30	1620 - 4320
NPD-9-45	0.09	0.29	2025 - 4860
NPD-9-65	0.08	0.30	3645 - 9720
NPD-18-45	0.09	0.29	8100 - 19440
NPD-18-65	0.08	0.30	14580 - 38880

**DIMENSIONAL DATA**

TYPE	A	B	C
NPD-2-45/65	2.00	2.00	0.38
NPD-3-45/65	3.00	3.00	0.38
NPD-4-45/65	4.00	4.00	0.38
NPD-6-45/65	6.00	6.00	0.38
NPD-9-45/65	9.00	9.00	0.38
NPD-18-45/65	18.00	18.00	0.38

**NOTES:**

1. FLEX PADS ARE NEOPRENE PADS MOUNTED TO UNDERSIDE OF FAN MOUNTING ANGLES.  
 A. NPD-45 IS 45 DUROMETER  
 B. NPD-65 IS 65 DUROMETER

ALL DIMENSIONS ARE IN INCHES

REVISION:

FORM:

REPLACES: