


ISOLATOR SUBMITTAL
 RESTRAINED SPRING, 1" DEFLECTION

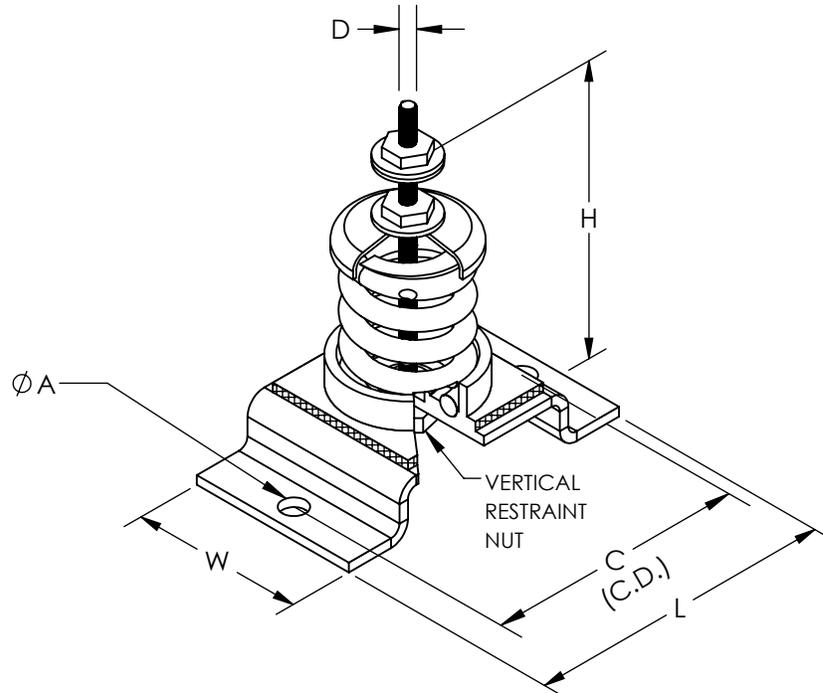

DIMENSIONAL DATA

SIZE	L	W	C	A	H	D
1-12/805	4.75	3.00	3.75	0.44	6.00	0.50

MODEL		SPRING COIL					
		COLOR		FREE HT.	O.D.	RATED (LBS)	
TYPE	SIZE	OUTER	INNER			LOAD	DEFL.
FRS	1-35	BLUE		3.19	1.75	35	1.04
FRS	1-70	GREEN		3.19	1.75	70	0.97
FRS	1-120	GRAY		3.19	1.75	120	0.98
FRS	1-220	BROWN		3.19	1.75	220	1.02
FRS	1-370	ORANGE		3.19	1.75	370	1.00
FRS	1-500	BEIGE		3.19	1.75	500	1.00
FRS	1-600	CHROME		3.19	1.75	600	1.02
FRS	1-700	BEIGE	WHITE	3.19	1.75	700	1.00
FRS	1-805	CHROME	WHITE	3.19	1.75	805	1.02

NOTES:

1. VERTICALLY AND LATERALLY RESTRAINED SPRING ISOLATOR.
2. REPLACEABLE NEOPRENE SNUBBER
3. MINIMUM OVERLOAD OF 50%
4. POWDER COATED SPRING ELEMENT, BRACKET IS HOT DIPPED GALVANIZED.
5. FOR ADEQUATE ANCHOR SIZING, TORQUE, AND BASEPLATE REQUIREMENTS, VISIT kineticsnoise.com/frs/restrained-spring-isolator

ALL DIMENSIONS ARE IN INCHES