



DATE:

TAG:


JOB:

PROJECT:


COMPANY:

SALES PERSON:


UVS2, CLASS-2, ARRANGEMENT-10 UTILITY VENT SET, SIZES 122-365

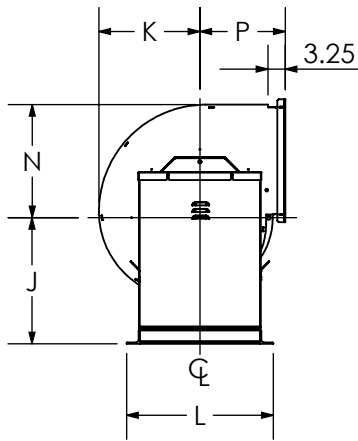

DRIVE SIDE VIEW

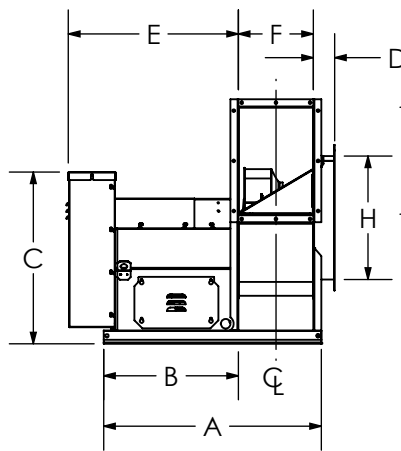

INLET VIEW



BOTTOM VIEW

STANDARD CONSTRUCTION:


1. Welded Housing
2. Steel Wheel
3. Welded Pedestal
4. Flanged Inlet and Outlet

OPTIONAL ACCESSORIES:

1. Weather Cover
(shown in illustration)
2. Inlet/Outlet Companion
Flanges
3. Vibration Isolators and Base
4. Shaft Seal
5. Inlet/Outlet Guard
6. Piezo Ring
7. Pressure Transducer
8. Disconnect Switch
9. Spark Resistant Const. (Type
B/C)

NOTES:

1. Only holes at corner are required for mounting
2. TAD discharge require duct extension
3. DB discharge not available with outlet flange

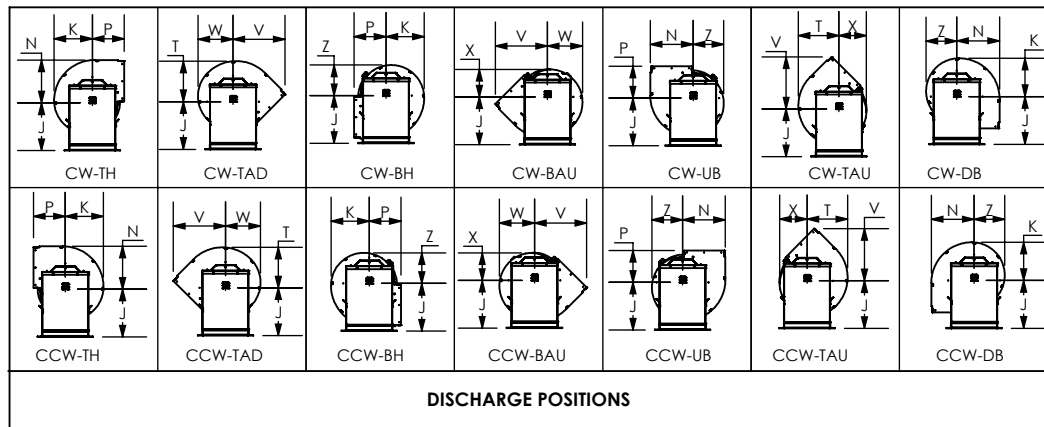

DISCHARGE POSITIONS

DIMENSIONAL DATA

Size	A	B	C	D	E	F	G	H	J	K	L	N	P	T	V	W	X	Z	AL	AB	AF	MAX. WT.(lbs)	MAX. RPM	MAX. MTR.
122	32.00	20.62	24.94	4.13	25.25	9.88	13.06	16.75	18.00	12.88	24.00	14.38	13.50	13.63	19.19	11.81	9.25	10.31	22.00	19.12	9.88	238	4700	184T
135	33.00	20.62	25.31	4.13	25.25	10.88	14.38	18.38	18.38	14.19	24.00	15.81	14.25	15.00	20.75	13.00	10.19	11.38	22.00	19.12	10.88	249	4300	215T
150	34.19	20.63	26.94	4.13	25.25	12.06	15.88	20.38	20.00	15.69	24.00	17.56	14.75	16.63	22.31	14.38	11.25	12.56	22.00	19.13	12.06	272	3850	215T
165	40.00	25.25	28.56	4.13	29.88	13.25	17.56	22.38	21.63	17.19	26.50	19.25	15.50	18.19	24.06	15.75	12.31	13.75	24.50	23.75	13.25	343	3500	215T
182	40.81	25.25	32.19	4.13	31.88	14.06	20.06	23.13	23.63	18.94	27.50	21.19	16.00	20.06	25.75	17.31	13.56	15.13	25.50	23.75	14.06	374	3000	215T
200	42.13	25.25	34.31	4.13	31.87	15.38	22.00	25.25	25.75	20.69	30.00	23.19	17.25	21.94	28.06	18.94	14.81	16.56	28.00	23.75	15.38	447	2750	256T
222	43.88	25.25	36.81	4.13	31.87	17.13	24.50	28.00	28.25	23.00	32.00	25.75	18.75	24.38	30.94	21.06	16.44	18.38	30.00	23.75	17.13	505	2450	256T
245	49.00	28.75	40.94	4.13	35.38	18.75	27.00	30.88	30.75	25.25	34.00	28.25	20.25	26.75	33.81	23.13	18.00	20.13	32.00	27.25	18.75	583	2200	286T
270	53.13	31.00	43.94	4.13	37.62	20.63	29.75	33.88	33.75	27.75	37.50	31.13	22.25	29.44	37.19	25.44	19.81	22.19	35.50	29.50	20.63	679	2000	324T
300	56.00	31.00	50.50	4.13	39.00	23.00	32.88	37.69	37.63	30.81	40.50	34.56	24.13	32.69	40.94	28.25	21.94	24.63	38.50	29.00	24.00	1012	1800	324T
330	58.25	31.00	53.88	4.13	39.00	25.25	36.19	41.44	41.00	33.81	44.00	37.94	26.50	35.88	45.00	30.94	24.13	27.00	42.00	29.00	26.25	1143	1650	326T
365	60.88	31.00	60.69	4.13	39.00	27.88	40.06	45.81	45.00	37.31	47.50	41.94	29.25	39.63	49.75	34.19	26.63	29.81	45.50	29.00	28.88	1314	1490	326T

ALL DIMENSIONS ARE IN INCHES, WEIGHTS ARE APPROXIMATE AND DOES NOT INCLUDE DRIVES OR ACCESSORIES.

REVISION:

FORM:

REPLACES: