


UVS2, CLASS-2, ARRANGEMENT- 10
INLET BOX AND CURB CAP, SIZES 122-270

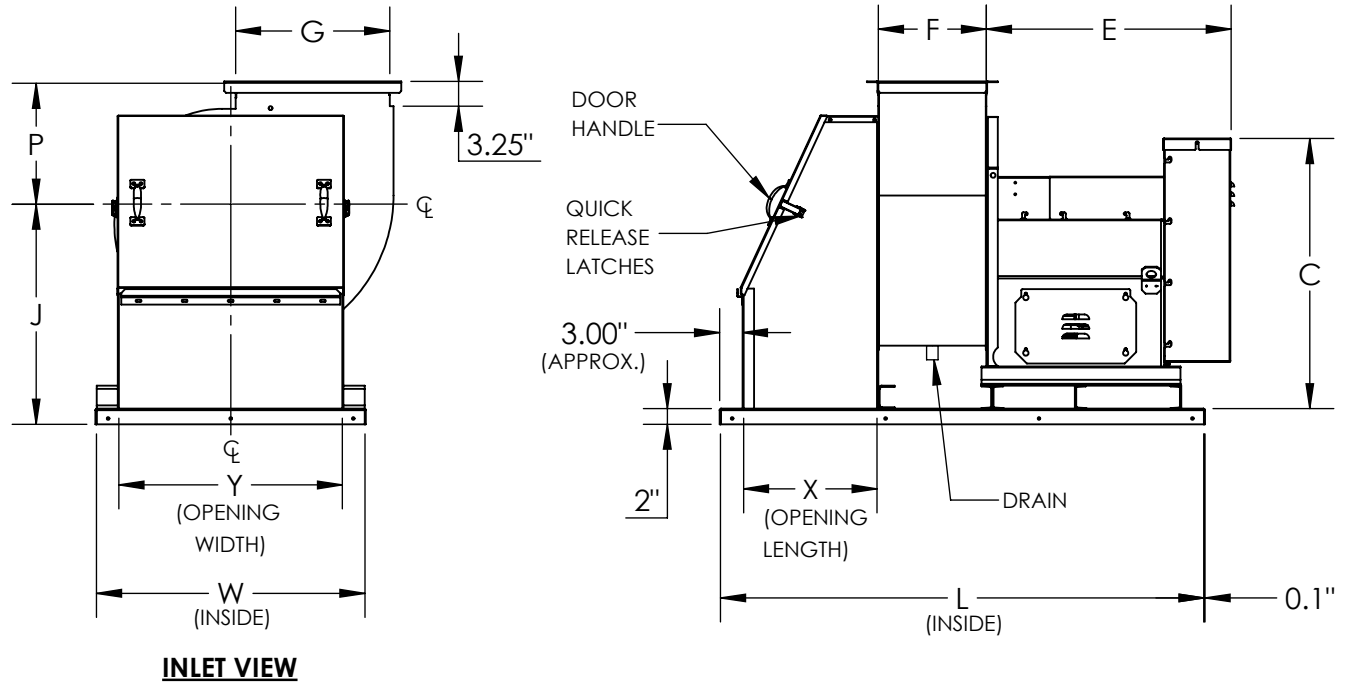

STANDARD FEATURES:

1. Discharge: UB
2. Rotation: CW/CCW (CW shown above)
3. Steel Wheel
4. Welded and Coated Housing and Pedestal
5. Welded and Coated Inlet Box and Curb Cap
6. 1045 TG&P Shaft
7. 80K L10 Life Bearings
8. Adjustable Motor Base Assembly
9. Weather Cover
10. Housing Drain & Plug - 3/4" NPT
11. Flange Outlet

OPTIONAL ACCESSORIES:

1. Speed Controllers (shipped loose only)
2. Grease Containment
3. Outlet Stack (Outlet Flange required)
4. Shaft Seal
5. Disconnect Switch.
6. Curb
7. Spark Resistant Const. (Type B/C)
8. Piezo Ring
9. Pressure Transducer
10. Outlet Screen
11. Access Door (Bolted or Hinged)

DIMENSIONAL DATA

Size	C	E	F	G	J	L	P	W	X	Y	MAX. WT. (lbs)	MAX RPM	MAX. MTR
122	27.94	25.25	9.88	13.06	21.00	50.00	13.50	25.00	13.00	19.00	376	4650	184T
135	28.31	25.25	10.88	14.38	21.38	51.00	14.25	28.00	13.00	22.00	403	4300	215T
150	29.94	25.25	12.06	15.88	23.00	52.00	14.75	30.00	13.00	24.00	442	3850	215T
165	31.56	29.88	13.25	17.56	24.63	61.00	15.50	33.00	16.00	27.00	551	3500	256T
182	35.19	31.88	14.06	20.06	26.63	63.00	16.00	35.00	17.50	29.00	610	3000	256T
200	37.31	31.87	15.38	22.00	28.75	68.00	17.25	38.00	20.50	32.00	719	2750	256T
222	39.81	31.87	17.13	24.50	31.25	71.00	18.75	42.00	22.00	36.00	820	2450	256T
245	43.94	35.38	18.75	27.00	33.75	78.00	20.25	45.00	24.00	39.00	947	2200	286T
270	46.94	37.62	20.63	29.75	36.75	80.00	22.25	48.00	22.50	42.00	1084	2000	324T

ALL DIMENSIONS ARE IN INCHES, WEIGHTS ARE APPROXIMATE AND DOES NOT INCLUDE DRIVES OR ACCESSORIES.