



vcPLUME-L, CLASS-2, ARRANGEMENT-10
HIGH VELOCITY NOZZLE, SIZES 122-365

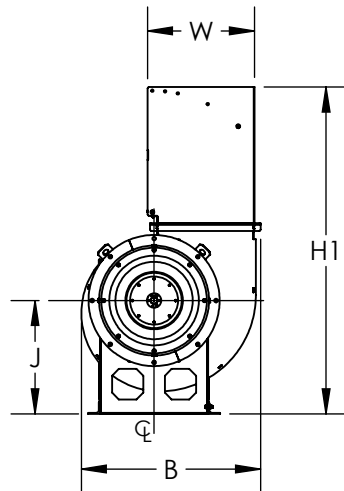


INLET SIDE VIEW

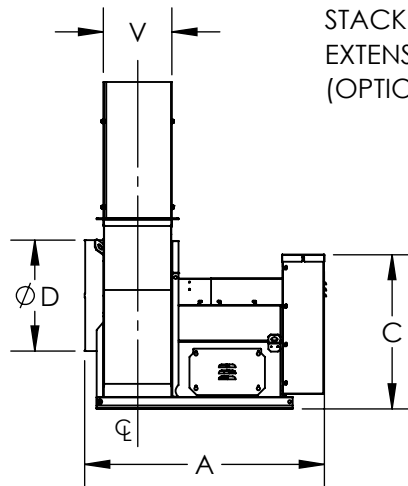


SIDE VIEW

STACK
EXTENSION
(OPTIONAL)

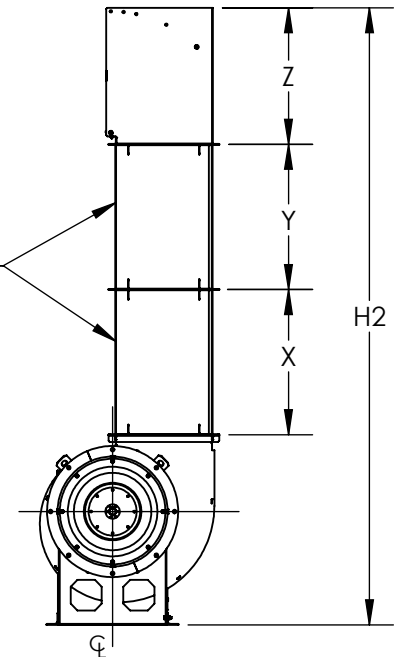

**FAN WITH OPTIONAL
STACK EXTENSION**

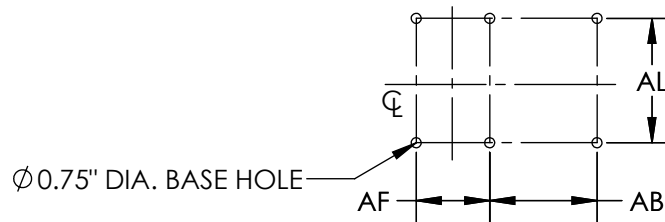

BOTTOM VIEW

DIMENSIONAL DATA

Size	A	B	C	D	J	H1	H2	V	W	X	Y	Z	AL	AB	AF	MAX. WT. (lbs)	MAX. RPM	MAX. MTR.
122	39.13	25.71	26.38	16.75	18.00	49.56	125.31	10.06	15.25	38.00	38.00	18.06	22.00	14.38	9.88	388	4700	184T
135	40.13	28.21	27.25	18.38	18.38	53.50	126.12	11.06	16.62	36.44	36.44	20.88	22.00	14.38	10.88	413	4300	215T
150	41.31	31.15	29.63	20.38	20.00	56.19	126.31	12.25	18.06	35.19	35.19	21.52	22.00	14.38	12.06	449	3850	215T
165	47.13	33.96	32.13	22.38	21.63	59.63	126.62	13.50	19.75	33.62	33.62	22.48	24.50	18.63	12.25	534	3500	215T
182	49.94	37.34	35.13	23.13	23.63	68.13	128.38	14.25	22.25	30.25	30.25	28.46	25.50	18.63	14.06	584	3000	215T
200	51.26	40.99	38.50	25.25	25.75	73.25	128.88	15.62	24.25	27.94	27.94	30.21	28.00	18.63	15.38	675	2750	256T
222	53.01	45.39	42.06	28.00	28.25	81.13	130.00	17.31	26.75	24.56	24.56	34.14	30.00	18.63	17.13	751	2450	256T
245	58.13	49.68	45.50	30.88	30.75	88.31	131.06	23.00	30.93	21.50	21.50	37.41	32.00	19.00	18.75	855	2200	286T
270	62.25	54.54	49.63	33.88	33.75	96.94	132.12	24.81	33.68	35.44	-	40.91	35.50	20.63	20.63	955	2000	324T
300	66.08	60.42	55.44	37.69	37.63	105.69	132.31	27.25	37.19	26.88	-	44.93	38.50	20.13	24.00	1318	1800	324T
330	68.33	66.17	60.63	41.44	41.00	116.50	134.50	29.50	40.50	18.25	-	40.46	42.00	20.13	26.25	1462	1650	326T
365	70.95	72.94	60.69	45.81	45.00	128.38	136.25	32.06	44.31	7.88	-	38.15	45.50	28.75	28.88	1644	1490	326T

ALL DIMENSIONS ARE IN INCHES, WEIGHTS ARE APPROXIMATE AND DOES NOT INCLUDE DRIVES.