



vcPLUME-L, CLASS-2, ARRANGEMENT-4
HIGH VELOCITY NOZZLE, SIZES 122-330

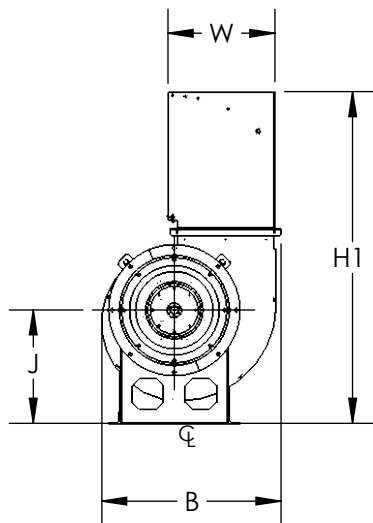


INLET SIDE VIEW

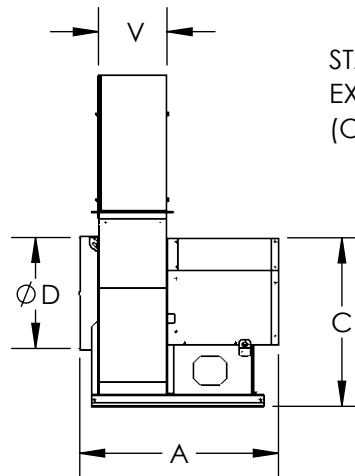


SIDE VIEW

STACK
EXTENSION
(OPTIONAL)

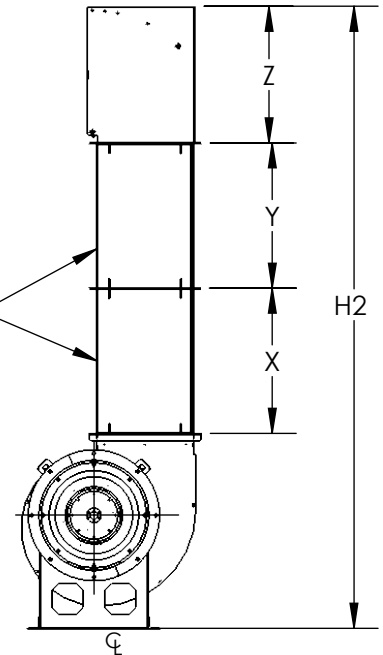

FAN WITH OPTIONAL
STACK EXTENSION

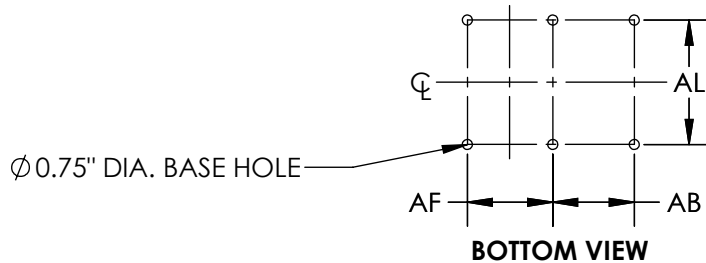

DIMENSIONAL DATA

Size	A	B	C	D	J	H1	H2	V	W	X	Y	Z	AL	AB	AF	MAX. WT. (lbs)	MAX. RPM	MAX. MTR.
122	32.62	25.71	26.38	16.75	18.00	49.56	125.56	10.06	15.25	38.00	38.00	18.06	22.00	14.38	9.88	314	4700	213T
135	33.62	28.21	27.25	18.38	18.38	53.50	126.38	11.06	16.62	36.44	36.44	20.88	22.00	14.38	10.88	340	4300	215T
150	34.81	31.15	29.63	20.38	20.00	56.19	126.56	12.25	18.06	35.19	35.19	21.52	22.00	14.38	12.06	374	3850	215T
165	40.56	33.96	32.13	22.38	21.63	59.63	126.81	13.50	19.75	33.62	33.62	22.48	24.50	18.63	12.25	435	3500	256T
182	41.37	37.34	35.13	23.13	23.63	68.13	128.56	14.25	22.25	30.25	30.25	28.46	25.50	18.63	14.06	494	3000	256T
200	42.68	40.99	38.50	25.25	25.75	73.25	129.13	15.62	24.25	27.94	27.94	30.21	28.00	18.63	15.38	569	2750	256T
222	44.44	45.39	42.06	28.00	28.25	81.13	130.25	17.31	26.75	24.56	24.56	34.14	30.00	18.63	17.13	643	2450	256T
245	48.5	49.68	45.50	30.88	30.75	88.31	131.31	23.00	30.93	21.50	21.50	37.41	32.00	19.00	18.75	716	2200	286T
270	53.25	54.54	49.63	33.88	33.75	96.94	132.38	24.81	33.68	35.44	-	40.91	35.50	20.63	20.63	803	2000	324T
300	55.62	60.42	55.44	37.69	37.63	105.69	132.56	27.25	37.19	26.88	-	44.93	38.50	20.13	24.00	1108	1800	324T
330	57.87	66.17	60.63	41.44	41.00	116.50	134.75	29.50	40.50	18.25	-	40.46	42.00	20.13	26.25	1238	1650	326T

ALL DIMENSIONS ARE IN INCHES, WEIGHTS ARE APPROXIMATE AND DOES NOT INCLUDE DRIVES.

REVISION:

FORM:

REPLACES: