
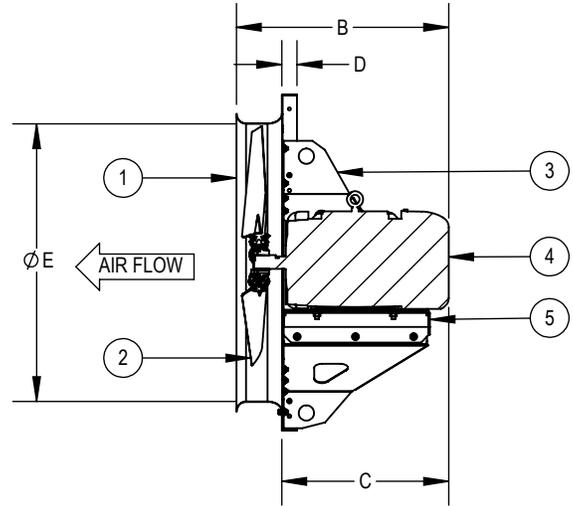


## LWP DD (EXHAUST)

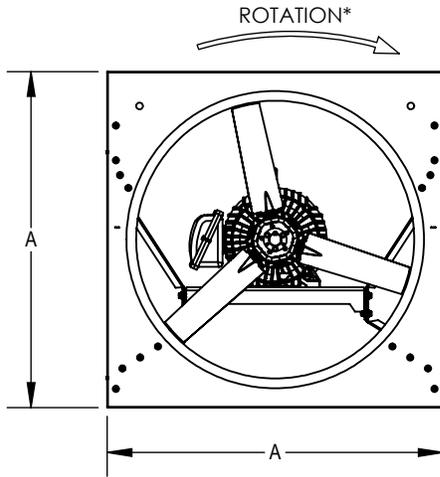

\*CORRECT ROTATION IS CCW WHEN VIEWING FROM INLET SIDE.

ALL DIMENSIONS IN INCHES

### DIMENSIONAL DATA

MODEL	A	B max	C	D	E	LESS MOTOR/DRIVE WEIGHT (lbs)
20	26.00	19.81	15.44	2.00	20.25	61
24	32.00	20.69	21.43	2.00	24.30	72
30	38.00	26.36	21.43	2.00	30.31	83
36	44.00	29.80	23.87	2.00	36.38	136
42	50.00	30.29	23.36	2.00	42.44	118
48	56.00	30.78	22.85	2.00	48.50	152
54	62.00	33.71	24.80	2.00	56.56	245
60	68.00	32.93	23.00	2.00	60.38	268

### LEGEND

- |                           |                        |
|---------------------------|------------------------|
| 1 VENTURI PANEL           | 4 MOTOR                |
| 2 PROPELLER               | 5 MOTOR MOUNTING PLATE |
| 3 MOTOR STRUCTURE BRACKET |                        |

### FEATURES

- Galvanized Steel Construction
- AMCA certified Air and Sound Performance.
- Exhaust or Supply applications.
- All propellers statically and dynamically balanced.
- Complies with AMCA Standard 204-96.
- UL 705 Certified

### OPTIONS



- 45 Degree Weather Hood
- 90 Degree Weather Hood
- Wall Sleeve
- Damper Guard
- Wall Collar
- Filter Box
- Slip in Fan Pack
- Dampers
- Safety Service Switch
- Transformers

REVISION:

FORM:

REPLACES:

## LWP DD (SUPPLY)

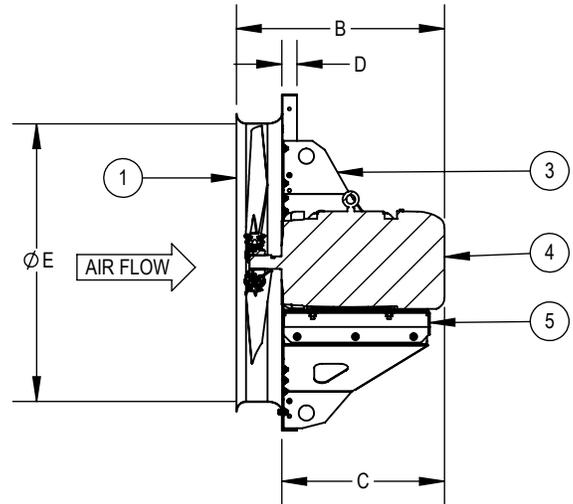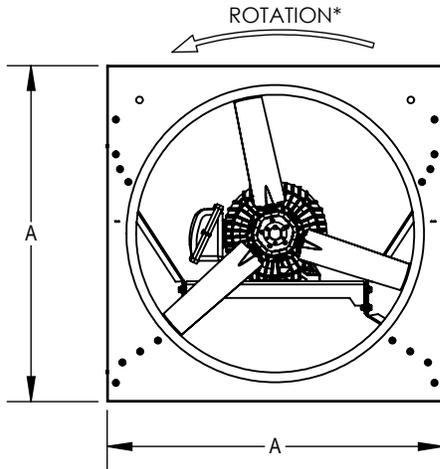

\*CORRECT ROTATION IS CCW WHEN VIEWING FROM INLET SIDE.

ALL DIMENSIONS IN INCHES

### DIMENSIONAL DATA

MODEL	A	B max	C	D	E	LESS MOTOR/DRIVE WEIGHT (lbs)
20	26.00	19.81	15.44	2.00	20.25	61
24	32.00	20.69	21.43	2.00	24.30	72
30	38.00	26.36	21.43	2.00	30.31	83
36	44.00	29.80	23.87	2.00	36.38	136
42	50.00	30.29	23.36	2.00	42.44	118
48	56.00	30.78	22.85	2.00	48.50	152
54	62.00	33.71	24.80	2.00	56.56	245
60	68.00	32.93	23.00	2.00	60.38	268

### LEGEND

- |                           |                        |
|---------------------------|------------------------|
| 1 VENTURI PANEL           | 4 MOTOR                |
| 2 PROPELLER               | 5 MOTOR MOUNTING PLATE |
| 3 MOTOR STRUCTURE BRACKET |                        |

### FEATURES

- Galvanized Steel Construction
- AMCA certified Air and Sound Performance.
- Exhaust or Supply applications.
- All propellers statically and dynamically balanced.
- Complies with AMCA Standard 204-96.
- UL 705 Certified

### OPTIONS

- 45 Degree Weather Hood
- 90 Degree Weather Hood
- Wall Sleeve
- Damper Guard
- Wall Collar
- Filter Box
- Slip in Fan Pack
- Dampers
- Safety Service Switch
- Transformers

REVISION:

FORM:

REPLACES: