



Wall Mounting Of Roof Top Belt Drive Fumex

FX08B-FX14B

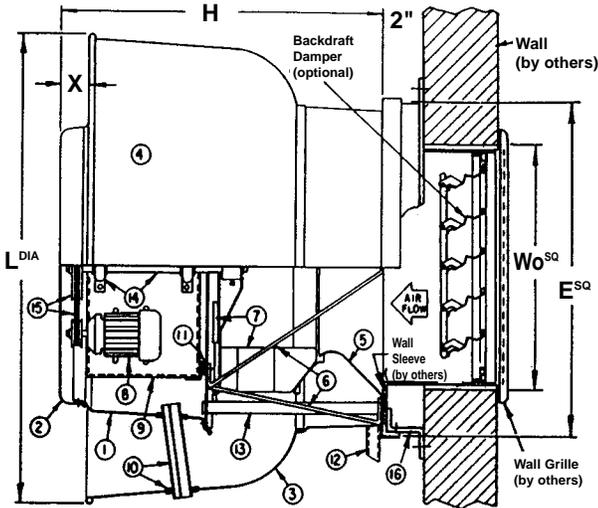

FX16B-FX24B

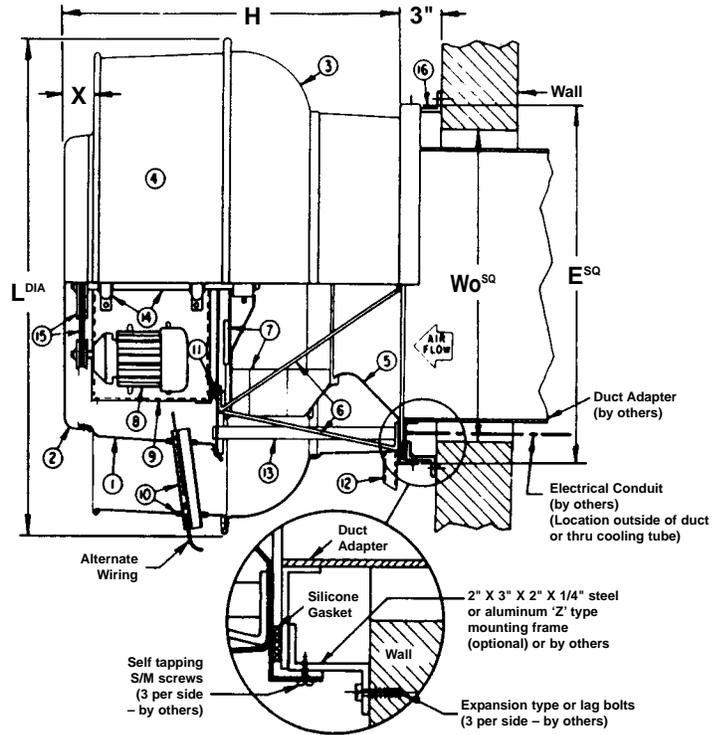

Legend

1. Motor Dome
2. Motor Dome Top
3. Discharge Apron*
4. Windband*
5. Spun Inlet Venturi
6. Tri-Strut™ Brace
7. Centrifugal Fan Wheel (With Intake Fan)
8. Motor
9. Motor Support Plate
10. Cooling Tube & Gaskets (Alternate Wire Passage)

11. Anti-Vibration Mounts
12. Drain Spout
13. Conduit Guide
14. Fan Shaft & Bearings
15. Belt & Pulley
16. Wall Mounting Frame (Optional or By Others)

* Discharge apron & windband is one piece on sizes FX08B-FX14B

Dimensional Data

	Belt Drive Models						
	FX08B	FX10B	FX13B	FX14B	FX16B	FX18B	FX24B
L DIA.	35	35	35	35	39	39	46
H	28 3/4	28 3/4	28 3/4	28 3/4	31	31	34 1/2
ESQ.	24 3/4	24 3/4	24 3/4	24 3/4	28 1/2	28 1/2	33 1/2
X	5 3/4	5 3/4	5 3/4	5 3/4	6 1/2	6 1/2	7
Wo SQ.	16	16	16	16	20	20	25

Note: Maximum motor size is 2 HP for wall mounted Fumex units.

All dimensions in inches.

Material: Spun Aluminum Housing



PENNBARRY™

1401 North Plano Road, Richardson, TX 75081

Ph: 972.234.3202 Fax: 972.497.0468

www.PennBarry.com

Submittal Sheet

Fumex - Belt Drive Spun Aluminum Centrifugal Wall Exhauster

This drawing illustrates our understanding of order requirements. When approved, it represents details for fabrication, as such, PennBarry will not be responsible for revisions in the field or other changes after release for fabrication. Published and protected by PennBarry, Richardson, TX. All rights reserved. May not be reproduced partially or in full without permission from the publisher. No rights conveyed to manufacture partially or in full, use or sell either the method of construction represented or any invention in any way related thereto.

Form ES-FMX5
Revised March 2005