
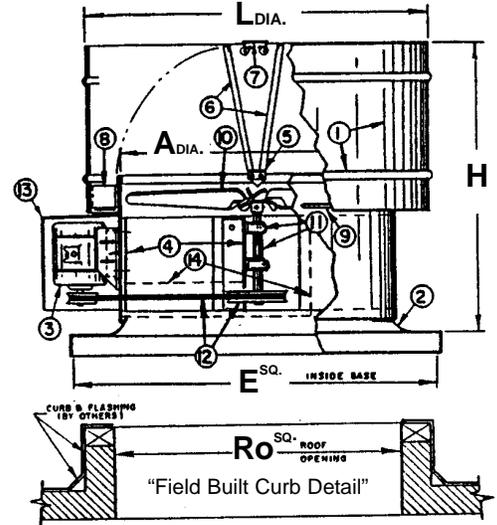
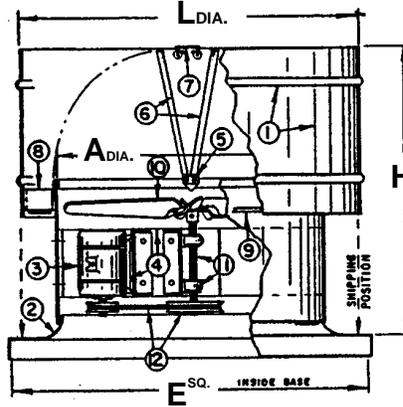


Hi-Ex

Direct Drive

Belt Drive

Remote Drive

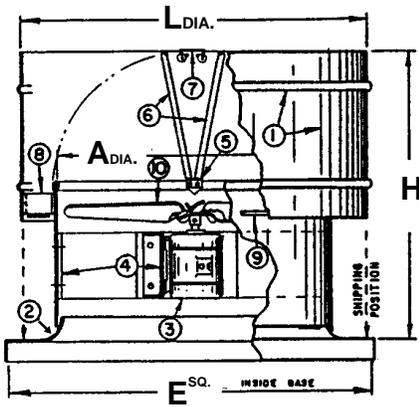

HC Models 24-72
HF Models 24-60
HX Models 24-48

Legend

- | | |
|--|--|
| 1. Protective Windband (Ribbed Reinforced) | 8. Supporting Brackets |
| 2. Spun Inlet Venturi | 9. Flutter Guard |
| 3. Ball Bearing Motor | 10. Propeller |
| 4. Drive Support Assembly (Plate Steel Webs) | 11. Fan Shaft & Bearings (Belt Drive Only) |
| 5. Drainage Gutter | 12. Belt & Pulleys (Belt Drive Only) |
| 6. Butterfly Damper Assembly | 13. Motor Weather Cover (Remote Drive Only) |
| 7. Damper Stop - Rubber Cushioned | 14. Belt & Bearing Enclosure with Air Guide (Optional Remote Drive Only) |

Dimensional Data

	Direct Drive and Belt Drive							
	24	30	36	42	48	54	60	72
A DIA.	26	32	38	44	50	56	62	74
H	40	44	48	51	60	62	65	66 1/2
L DIA.	33	39	45	51	57	63	69	81
E † SQ.	36	42	48	54	60	66	72	84
R ₀ SQ.	26	32	38	44	51	57	63	75

† Outside dimension of curb should be 1 1/2" less than 'E' dimension.

All dimensions in inches.

Material: Galvanized Steel Housing (Aluminum housing is available as an option)

 PENNBARRY™ 1401 North Plano Road, Richardson, TX 75081 Ph: 972.234.3202 Fax: 972.497.0468 www.PennBarry.com	<h2 style="margin: 0;">Submittal Sheet</h2> <h3 style="margin: 0;">Hi-Ex - Models HC, HF & HX</h3> <h4 style="margin: 0;">Uplblast Axial Roof Exhausters</h4> <h4 style="margin: 0;">Direct, Belt or Remote Drive</h4>
--	--

This drawing illustrates our understanding of order requirements. When approved, it represents details for fabrication, as such, PennBarry will not be responsible for revisions in the field or other changes after release for fabrication. Published and protected by PennBarry, Richardson, TX. All rights reserved. May not be reproduced partially or in full without permission from the publisher. No rights conveyed to manufacture partially or in full, use or sell either the method of construction represented or any invention in any way related thereto.

Form ES-HC, HF, HX
Revised March 2005