

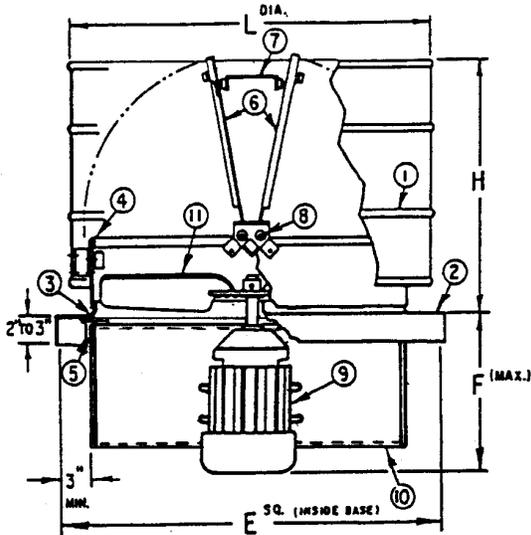


Hi-Ex HiteSaver - Model HS

Direct Drive



Belt Drive

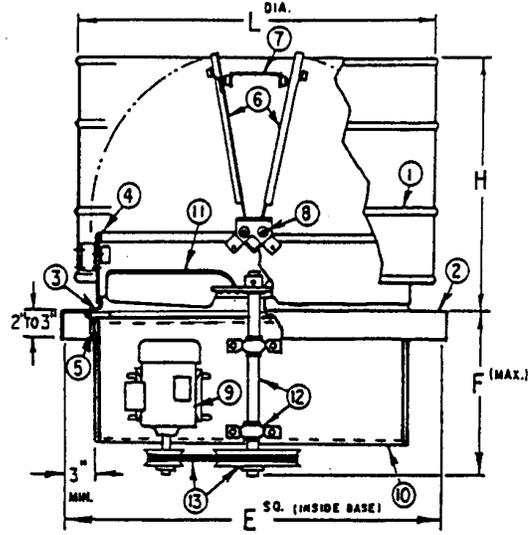

Legend

- | | |
|--|---|
| 1. Protective Windband (Ribbed Reinforced) | 8. Rain Channel and Damper Bearings |
| 2. Curb Base | 9. Ball Bearing Motor |
| 3. Venturi-type Orifice | 10. Motor Mounting Plate |
| 4. Throat with Top Gasket | 11. Propeller (Fabricated Steel) |
| 5. Welded Steel Internal Bracing | 12. Fan Shaft and Bearings (Belt Drive) |
| 6. Butterfly Damper Assembly | 13. Belt and Pulleys (Belt Drive) |
| 7. Damper-Stop Rubber Cushioned | |

Dimensional Data

	HS24	HS30	HS36	HS42	HS48	HS54	HS60
L Dia	33	36	42	48	54	60	66
H	24	24	26	30	32	32	36
†E^{SQ.}	33 1/2	38 1/2	44 1/2	50 1/2	56 1/2	66	72
Ro^{SQ.}	29	34	40	46	52	61 1/2	67 1/2
F^(MAX.)	15	15	15	18	18	18	18

† Outside dimension of curb should be 1 1/2" less than 'E' dimension.

All dimensions in inches.

Material: Galvanized Steel Housing (Aluminum housing is available as an option).

 <p>PENNBARRY™</p> <p>1401 North Plano Road, Richardson, TX 75081 Ph: 972.234.3202 Fax: 972.497.0468 www.PennBarry.com</p>	<h2 style="margin: 0;">Submittal Sheet</h2> <h3 style="margin: 0;">Hi-Ex HiteSaver - Model HS</h3> <h4 style="margin: 0;">Upblast Axial Roof Exhauster</h4> <h4 style="margin: 0;">Direct and Belt Drive</h4>
--	---

This drawing illustrates our understanding of order requirements. When approved, it represents details for fabrication, as such, PennBarry will not be responsible for revisions in the field or other changes after release for fabrication. Published and protected by PennBarry, Richardson, TX. All rights reserved. May not be reproduced partially or in full without permission from the publisher. No rights conveyed to manufacture partially or in full, use or sell either the method of construction represented or any invention in any way related thereto.

Form ES-HS
Revised March 2005