


ZEPHYR INLINE RIGHT ANGLE DISCHARGE UNIT (RA)

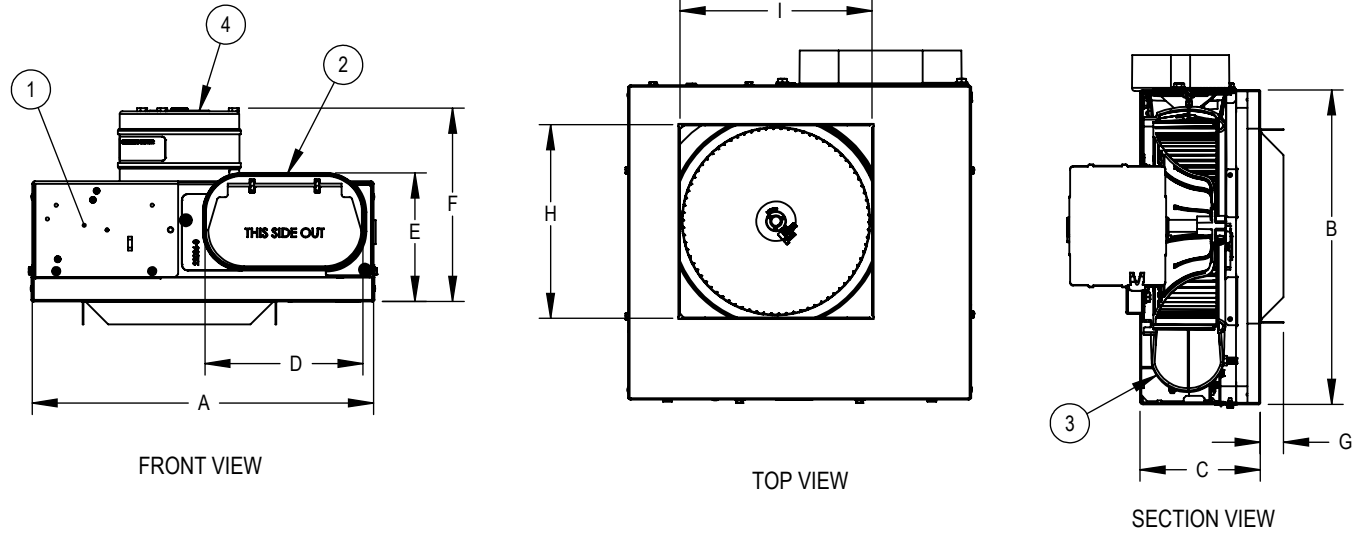

DIMENSIONAL DATA

A	B	C	D	E	F		G	H	I
					26 W (1/28 HP)	106 W (1/7 HP)			
14.29	13.10	5.01	6.73	5.34	5.01	8.04	1.00	8.07	8.07

ALL DIMENSION IN INCHES

LEGEND

1 CASSETTE BOX	3 SCROLL	5 WHEEL
2 CASSETTE OUTLET	4 MOTOR	

FEATURES

- PRECISION INLINE MOUNT EXHAUST FAN
- TOTALLY ENCLOSED EC MOTOR, DIRECT DRIVE
- SOUND LEVEL UNDER ONE SONE ON SELECT MODELS
- UL507, UL705, TUB AND SHOWER, AMCA SOUND AND AIR CERTIFIED
- CAPACITY FROM 100-500 CFM, 0-1" W.G.
- PRECISION-TUNED, ULTRA LIGHT WEIGHT CENTRIFUGAL WHEEL AND SCROLL
- OPTIMIZED INLET
- SPEED CONTROLLER AND DISCONNECT SWITCH ARE STANDARD

OPTIONS

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • OUTLET DUCT SIZE <ul style="list-style-type: none"> <input type="checkbox"/> 4 INCH <input type="checkbox"/> 6 INCH • HORSE POWER <ul style="list-style-type: none"> <input type="checkbox"/> 26 W (1/28 HP) <input type="checkbox"/> 106 W (1/7 HP) | <ul style="list-style-type: none"> • MOTION SENSOR <ul style="list-style-type: none"> <input type="checkbox"/> NONE <input type="checkbox"/> CEILING MOUNT <input type="checkbox"/> WALL MOUNT • HUMIDITY SENSOR <ul style="list-style-type: none"> <input type="checkbox"/> NONE <input type="checkbox"/> HUMIDITY SENSOR | <ul style="list-style-type: none"> • CURB CAP <ul style="list-style-type: none"> <input type="checkbox"/> NONE <input type="checkbox"/> CURB MOUNTED <input type="checkbox"/> FLAT ROOF <input type="checkbox"/> SLOPED ROOF <input type="checkbox"/> WALL MOUNT • BRICK VENT <ul style="list-style-type: none"> <input type="checkbox"/> NONE <input type="checkbox"/> BRICK VENT |
|---|---|---|