



**MXI-ARRANGEMENT-9, LEVEL 2,  
 HORIZONTAL, MOUNTING RAIL**

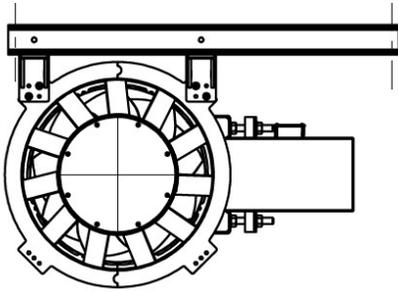


**HORIZONTAL CEILING HUNG**

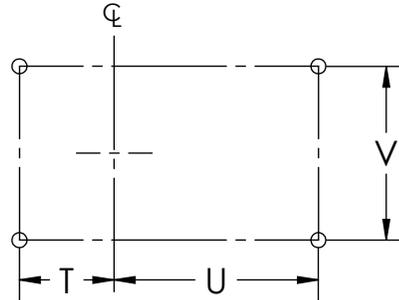

**FOUNDATION PLAN VIEW**

ALL VIEWS ARE FROM DISCHARGE END  
 WITH "C" MOTOR POSITION

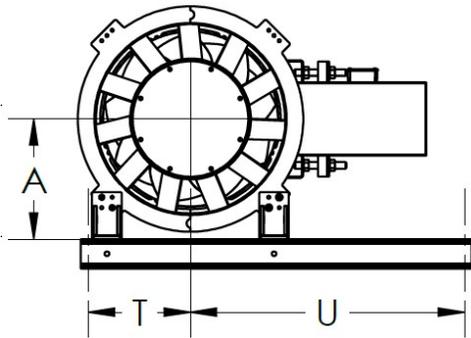

**HORIZONTAL BASE MOUNT**

1. MOUNTING RAILS ARE NEEDED WHEN FAN WILL BE MOUNTED HORIZONTALLY WITH USE OF ISOLATORS AND AT MOTOR POSITIONS "C" AND "G"
2. "G" POSITION OF MOTOR WILL BE EXACTLY OPPOSITE TO "C"
3. MOUNTING RAILS TO BE SHIPPED LOOSE WITH HARDWARE
4. ISOLATORS ARE SUPPLIED AS PER ORDER

**DIMENSIONAL DATA**

Size	A	T	U	V	Mounting Rail Section	MXI FAN WEIGHT (LESS MOTOR) (LBS)	MXI-AF FAN WEIGHT (LESS MOTOR) (LBS)
122	12 11/16	10 7/8	29 1/2	25 1/4	C3 x 4.1	236	237
135	14	11 9/16	30 7/16	27 15/16	C3 x 4.1	271	270
150	14 3/4	12 5/16	32 15/16	31 1/16	C3 x 4.1	320	324
165	15 5/16	12 7/8	34.5	34 1/8	C3 x 4.1	358	363
182	16 3/16	13 3/4	38 7/8	37 5/8	C4 x 5.4	468	473
200	17 1/16	14 5/8	40	41 5/16	C4 x 5.4	546	550
222	19 5/8	17 1/16	41 9/16	45 7/8	C5 x 6.7	673	666
245	20 7/8	18 3/16	46 1/4	52 1/16	C6x 8.2	796	792
270	22 1/8	19 7/16	48	57 1/4	C6x 10.5	936	945
300	24 3/4	21 5/16	48 9/16	63 7/16	C6x 10.5	1154	1144
330	26 1/4	22 13/16	52 3/16	69 5/8	C8x11.5	1343	1355
365	29	24 9/16	58 3/8	77 1/16	C8x11.5	1878	1875
402	31 7/8	27 7/16	61 9/16	84 11/16	C10x15.3	2260	2218
445	34 5/16	29 7/8	67 11/16	93 1/2	C12x30	2732	2678
490	38 1/2	32 5/8	71 5/16	104 1/4	C12x30	3175	-
542	41 7/16	35 9/16	76 1/8	115	C12x30	3753	-
600	46 1/2	38 5/8	81 15/16	126 15/16	C12x30	4480	-

ALL DIMENSIONS ARE IN INCHES

REVISION:

FORM:

REPLACES: