

# RAU/RAUMO Series

## Roof Axial Upblast Ventilators




### Introducing our new line of Roof Axial Upblast Fans

*PennBarry is introducing its new line of Roof Axial Upblast ventilators.*

*The RAU/RAUMO is ideal to provide exhaust ventilation where removal of high volume of air for large spaces is necessary such as warehouses, gymnasiums, manufacturing facilities and other general ventilation applications.*


*These Upblast Roof Axial Exhaust Ventilators offer a robust construction of galvanized steel making them weather resistant while maintaining a competitive weight. Both the RAU / RAUMO features equal roof curb dimensions for ease of new installations. Their curb dimensions match most common curb dimensions existent in the market which facilitates retrofit jobs.*

*The RAUMO provides easy access to the motor and drives for service and parts replacement directly from the roof eliminating the need of disturbing the interior space. The motor compartment is accessible without tools for ease of service.*

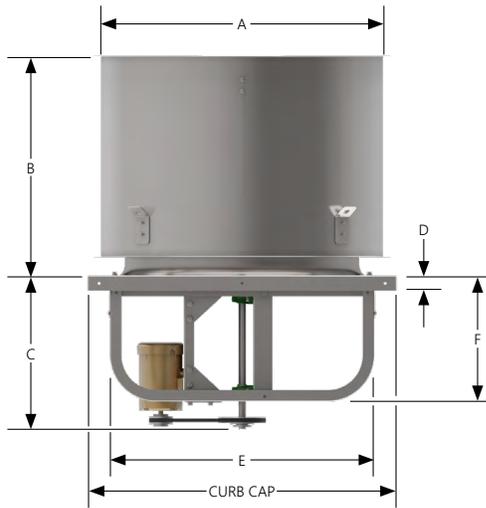

## RAU

Model	A	B	C	D	E	F	Curb Cap
20	28.25	22.88	16.38	2.00	23.38	12.38	30.00
24	30.50	25.75	15.88	2.00	28.13	12.38	34.00
30	38.50	28.50	19.88	2.00	34.50	16.38	40.00
36	42.50	33.00	19.75	2.00	41.00	19.75	46.00
42	50.75	37.00	19.75	2.00	47.50	16.38	52.00
48	57.00	41.13	21.00	2.00	53.50	17.50	58.00
54	61.88	45.13	22.63	2.00	61.00	19.00	66.50
60	70.88	49.25	23.00	2.00	67.00	19.00	72.50

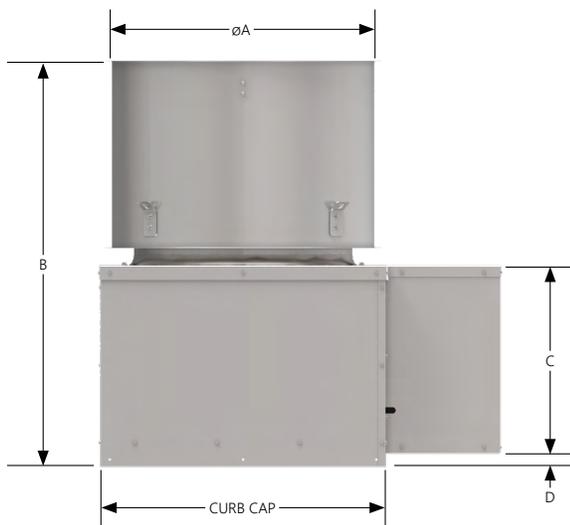

## RAUMO

Model	A	B	C	D	Curb Cap
20	28.25	46.88	21.25	2.25	29.50
24	30.50	49.75	21.75	2.25	33.50
30	38.50	56.38	25.75	2.25	39.50
36	42.50	61.00	25.75	2.25	45.50
42	50.75	65.00	25.75	2.25	51.50
48	57.00	69.00	25.75	2.25	57.50
54	61.88	74.88	27.50	2.25	66.00
60	70.88	80.63	29.25	2.25	72.00

### Features of RAU/RAUMO Fans:

- Static pressure up to 0.5 in. wg.
- Flow capacity up to 37,000 CFM.
- Statically and dynamically balanced stamped aluminum propeller with steel hub.
- Galvanized Steel Construction.
- Complies with AMCA Standard 204-96.
- Size range from 20" to 60".

**For more information, contact your local sales representative or visit our website at [www.pennbarry.com](http://www.pennbarry.com)**



**PENN BARRY™**