


**MXI-ISOLATOR, CEILING HUNG,  
 RUBBER IN SHEAR**

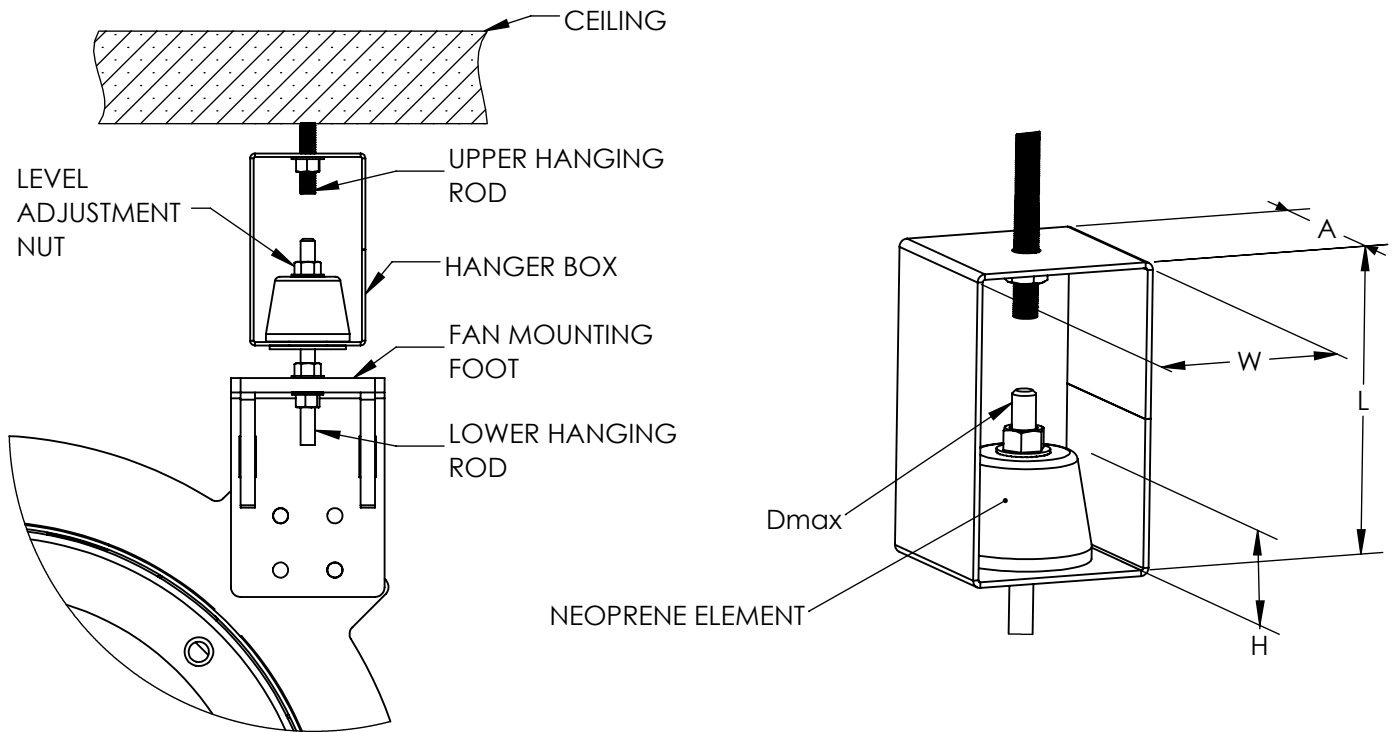

**INSTALLATION INSTRUCTIONS-**

1. LOCATE EACH HANGER IN POSITION USING DRAWING. ATTACH HANGER BOX TO UPPER HANGING
2. ROD AND FAN TO LOWER HANGING ROD.
3. IF NECESSARY ADJUST FAN LEVEL USING LEVEL ADJUSTMENT NUT.
4. CHECK ALIGNMENT BETWEEN LARGER HOLE ON BOTTOM OF HANGER BOX AND LOWER HANGING ROD.

**DIMENSIONAL DATA**

LEVEL 1 SIZES	RATED LOAD(lbs)	RATED DEFLECTION(in)	A	Dmax	H	L	W
<b>122-165</b>	125	0.04	1 1/2	3/8	7/16	2 3/4	2 1/8
<b>182-200</b>	175	0.35	2 1/4	3/4	1 5/8	5 15/16	3 1/8
<b>222-245</b>	300	0.53	2 1/4	3/4	1 5/8	5 15/16	3 1/8
<b>270-365</b>	450	0.55	2 1/4	3/4	1 5/8	5 15/16	3 1/8
<b>402</b>	700	0.57	3 5/8	7/8	2	8 9/16	5 9/16
<b>445-542</b>	1100	0.46	3 5/8	7/8	2	8 9/16	5 9/16
<b>600</b>	2000	0.53	3 5/8	7/8	2	8 9/16	5 9/16

ALL DIMENSIONS ARE IN INCHES

REVISION:

FORM:

REPLACES: